



# Heyco® Reducer Snap Bushings

Mounting Diameter: .375" to 2.000"


- Converts raw-edged holes to smooth, neat, insulated holes.
- Locking fingers snap into holes with fingertip pressure.
- Withstands a push back force of 35 pounds.
- Insulates and mechanically protects electrical and telecommunications cables, tubing, hose, rope, and utility lines.
- Available in multiple sizes for use in .375" (9,5 mm) to 2.000" (50,8 mm) diameter holes.
- For maximum inside diameters see Snap Bushings on pages 4-1 and 4-2.

| PANEL DIMENSIONS  |     |                        |           | PART NO. |       | DESCRIPTION | PART DIMENSIONS   |      |                 |      |                  |      |
|-------------------|-----|------------------------|-----------|----------|-------|-------------|-------------------|------|-----------------|------|------------------|------|
| Maximum Thickness |     | Mounting Hole Diameter |           | Black    | White |             | A Inside Diameter |      | B Head Diameter |      | C Overall Height |      |
| in.               | mm. | in.                    | mm.       |          |       | in.         | mm.               | in.  | mm.             | in.  | mm.              |      |
| .125              | 3,2 | .375                   | 9,5       | 2020     | 2021  | SB 375-3    | .187              | 4,8  | .468            | 11,9 | .406             | 10,3 |
| .125              | 3,2 | .437                   | 11,1      | 2042     | 2037  | SB 437-243  | .243              | 6,2  | .531            | 13,5 | .406             | 10,3 |
| .125              | 3,2 | .437                   | 11,1      | 2038     | 2039  | SB 437-4    | .270              | 6,8  | .531            | 13,5 | .406             | 10,3 |
| .125              | 3,2 | .500                   | 12,7      | 2058     | 2059  | SB 500-4    | .250              | 6,4  | .570            | 14,5 | .406             | 10,3 |
| .125              | 3,2 | .500                   | 12,7      | 2049     | 2050  | SB 500-5    | .312              | 7,9  | .570            | 14,5 | .406             | 10,3 |
| .125              | 3,2 | .562                   | 14,3      | 2060     | 2061  | SB 562-5    | .312              | 7,9  | .656            | 16,7 | .406             | 10,3 |
| .125              | 3,2 | .562                   | 14,3      | 2063     | 2064  | SB 562-6    | .391              | 9,9  | .656            | 16,7 | .406             | 10,3 |
| .125              | 3,2 | .625                   | 15,9      | 2075     | 2078  | SB 625-4    | .250              | 6,4  | .718            | 18,2 | .406             | 10,3 |
| .125              | 3,2 | .625                   | 15,9      | 2070     | 2071  | SB 625-7    | .437              | 11,1 | .718            | 18,2 | .406             | 10,3 |
| .125              | 3,2 | .687                   | 17,4      | 2083     | 2084  | SB 687-8    | .500              | 12,7 | .781            | 19,8 | .406             | 10,3 |
| .125              | 3,2 | .750                   | 19,1      | 2090     | 2091  | SB 750-6    | .391              | 9,9  | .850            | 21,6 | .406             | 10,3 |
| .125              | 3,2 | .750                   | 19,1      | 2092     | 2099  | SB 750-8    | .500              | 12,7 | .850            | 21,6 | .406             | 10,3 |
| .125              | 3,2 | .750                   | 19,1      | 2093     | 2094  | SB 750-9    | .562              | 14,3 | .850            | 21,6 | .406             | 10,3 |
| .125              | 3,2 | .812                   | 20,6      | 2100     | 2101  | SB 812-9    | .562              | 14,3 | .890            | 22,6 | .406             | 10,3 |
| .125              | 3,2 | .875                   | 22,2      | 2110     | 2111  | SB 875-6    | .375              | 9,5  | .953            | 24,2 | .453             | 11,5 |
| .125              | 3,2 | .875                   | 22,2      | 2113     | 2114  | SB 875-7    | .437              | 11,1 | .953            | 24,2 | .453             | 11,5 |
| .125              | 3,2 | .875                   | 22,2      | 2116     | 2117  | SB 875-8    | .500              | 12,7 | .953            | 24,2 | .453             | 11,5 |
| .125              | 3,2 | .875                   | 22,2      | 2120     | 2121  | SB 875-9    | .562              | 14,3 | .953            | 24,2 | .453             | 11,5 |
| .125              | 3,2 | .875                   | 22,2      | 2123     | 2124  | SB 875-10   | .625              | 15,9 | .953            | 24,2 | .453             | 11,5 |
| .125              | 3,2 | 1.093-1.125            | 27,8-28,6 | 2160     | 2161  | SB 1093-13  | .812              | 20,6 | 1.218           | 30,9 | .453             | 11,5 |
| .125              | 3,2 | 1.093-1.125            | 27,8-28,6 | 2163     | 2164  | SB 1093-14  | .875              | 22,2 | 1.218           | 30,9 | .453             | 11,5 |
| .125              | 3,2 | 1.250                  | 31,8      | 2198     | 2199  | SB 1250-15  | .937              | 23,8 | 1.359           | 34,5 | .453             | 11,5 |
| .125              | 3,2 | 1.375                  | 34,9      | 2207     | 2208  | SB 1375-14  | .875              | 22,2 | 1.490           | 37,3 | .453             | 11,5 |
| .125              | 3,2 | 1.500                  | 38,1      | 2233     | 2234  | SB 1500-17  | 1.062             | 27,0 | 1.609           | 40,9 | .453             | 11,5 |
| .125              | 3,2 | 1.500                  | 38,1      | 2236     | 2237  | SB 1500-18  | 1.125             | 28,6 | 1.609           | 40,9 | .453             | 11,5 |
| .125              | 3,2 | 2.000                  | 50,8      | 2400     | 2401  | SB 2000-26  | 1.640             | 41,6 | 2.125           | 54,0 | .453             | 11,5 |

Standard color black. Consult Heyco for white and other colors.

\*Depicts single panel design.

Locking fingers in fractional increment up to the maximum panel thickness.

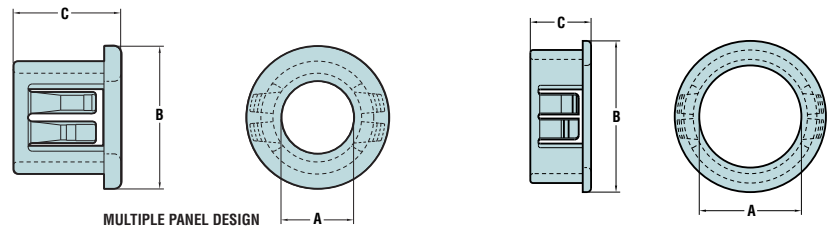

*Quick Specs*

|                            |   |
|----------------------------|---|
| Material                   | 6/6 Nylon   |
| Certifications             | Recognized under the Component Program of Underwriters' Laboratories, File E15331<br>Certified by Canadian Standards Association, File LR8919 |
| Flammability Rating        | 94V-2   |
| Material Temperature Index | 257°F (125°C)—Maximum temperature on part not to exceed 221°F (105°C)   |