



Introducing the **CBSPM** Pull Mount Circuit Board Support

Features and Benefits

- Rubber spacer provides shock and vibration protection
- Long pull mount ends are easily fed into panel holes and pulled into locked position
- Once installed, the ends are easily cut off leaving low profile mounting fixes
- Reduces the number of hardware needed for assembly
- Available in 5 spacer lengths

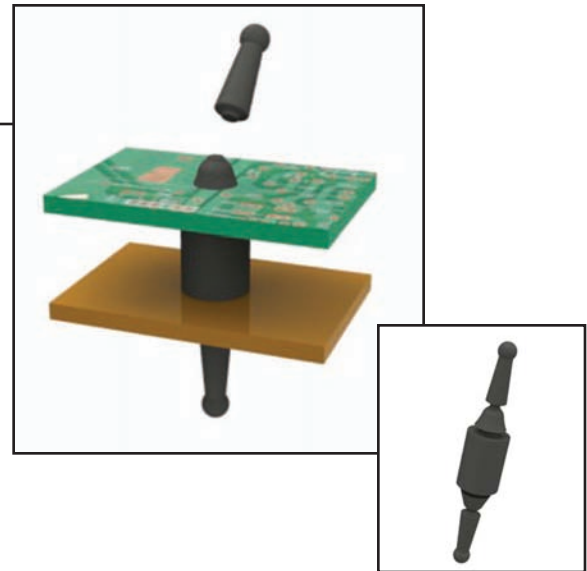

Top Hole: .187 (4.75)
Panel Thickness: .094 (2.4) Max.

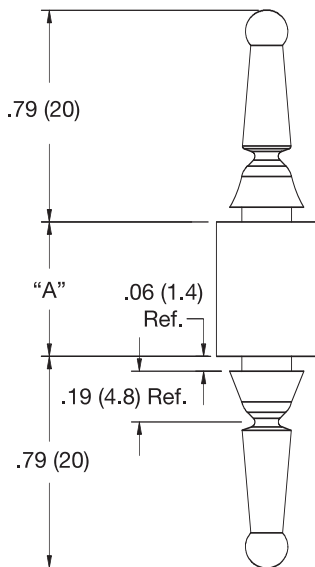

Bottom Hole: .187 (4.75)
Panel Thickness: .094 (2.4) Max.

Markets

- Telecommunications
- Consumer Electronics
- Industrial
- Appliance

Other Related Richco Product Solutions



Material: EPDM, 45 Shore A, RMS-178 Color: Black	
Standard Pack: 1,000 per bag	
Part No.	"A" Standoff Height
CBSPM-4	.250 (6.35)
CBSPM-6	.375 (9.53)
CBSPM-8	.500 (12.7)
CBSPM-10	.625 (15.88)
CBSPM-12	.750 (19.05)

