


Introducing the *QTE*— Q-Tie

Features and Benefits

- Top-loading system enables blind mounting
- Unique “pre-lock” system allows for temporary mounting
- Advanced track system ensures a secure lock
- Easy and fast installation
- Ergonomic design
- Patented

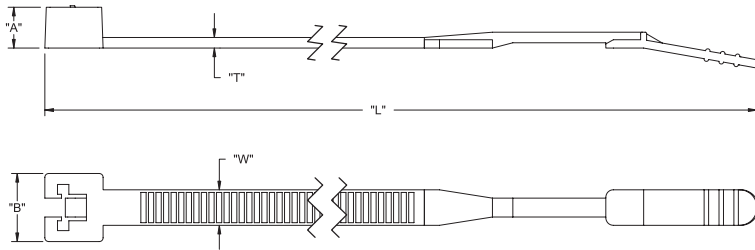

Markets

- Automotive
- Electrical
- Construction
- White Goods
- Aviation & Ship Building

Mat'l: Nylon 6/6 RMS-220** Color: Natural	Mat'l: UV Stabilized Nylon 6/6, RMS-221 Color: Black	Min Loop Tensile Strength lbs. (kg.)	Max Bundle Dia.	Length "L" Ref.	Thickness "T" Ref.	Width "W" Ref.	Head Thickness "A"	Head Width "B"	Standard Pack
QTE-18R*	QTE-18R-UVB*	18 (8)	.945 (24)	4.134 (105)	.039 (1)	.102 (2.6)	.146 (3.7)	.197 (5)	1,000
QTE-18L*	QTE-18L-UVB*		1.575 (40)	6.102 (155)					
QTE-18V*	QTE-18V-UVB*		1.969 (50)	7.677 (195)					
QTE-30R	QTE-30R-UVB	30 (13)	1.496 (38)	6.229 (160)	.051 (1.3)	.142 (3.6)	.181 (4.6)	.276 (7)	
QTE-30L	QTE-30L-UVB		1.969 (50)	7.874 (200)					
QTE-30XL	QTE-30XL-UVB		2.559 (65)	9.843 (250)					
QTE-30VL	QTE-30VL-UVB		3.228 (82)	11.811 (300)					
QTE-50R	QTE-50R-UVB	50 (22)	1.969 (50)	8.268 (210)	.055 (1.4)	.185 (4.7)	.213 (5.4)	.354 (9)	100
QTE-50RL	QTE-50RL-UVB		2.953 (75)	11.417 (290)					
QTE-50L	QTE-50L-UVB		4.331 (110)	16.142 (410)					
QTE-120SL	QTE-120SL-UVB	120 (54)	2.756 (70)	11.811 (300)	.072 (1.8)	.303 (7.7)	.299 (7.6)	.520 (13.2)	
QTE-120R	QTE-120R-UVB		4.331 (110)	16.535 (420)					
QTE-120L	QTE-120L-UVB		5.709 (145)	20.472 (520)					

*18 lb. Ties Do Not Have a Pre-Lock Feature

** Parts are available in UL94 V0 material by special order only. To order, add -VO to end of part number.

Other Related Richco Product Solutions




WIT




WIT-RT




BT



FTH-22-01



RKW



FTH-7A1-RT