



## Introducing the *RBF*— Barbed Fasteners

### Features and Benefits

- Ribs deflect when pushed into a hole, then spring back for a secure, non-removable lock
- Easily push mounts into a panel or board
- Installs quickly by hand
- Low profile head is ideal for tight spaces
- Manufactured in a durable Nylon 6/6 material in black color
- Parts are also available in natural color or flame retardant material by special order
- Other combinations of head, barbed end, and body length are available by special order

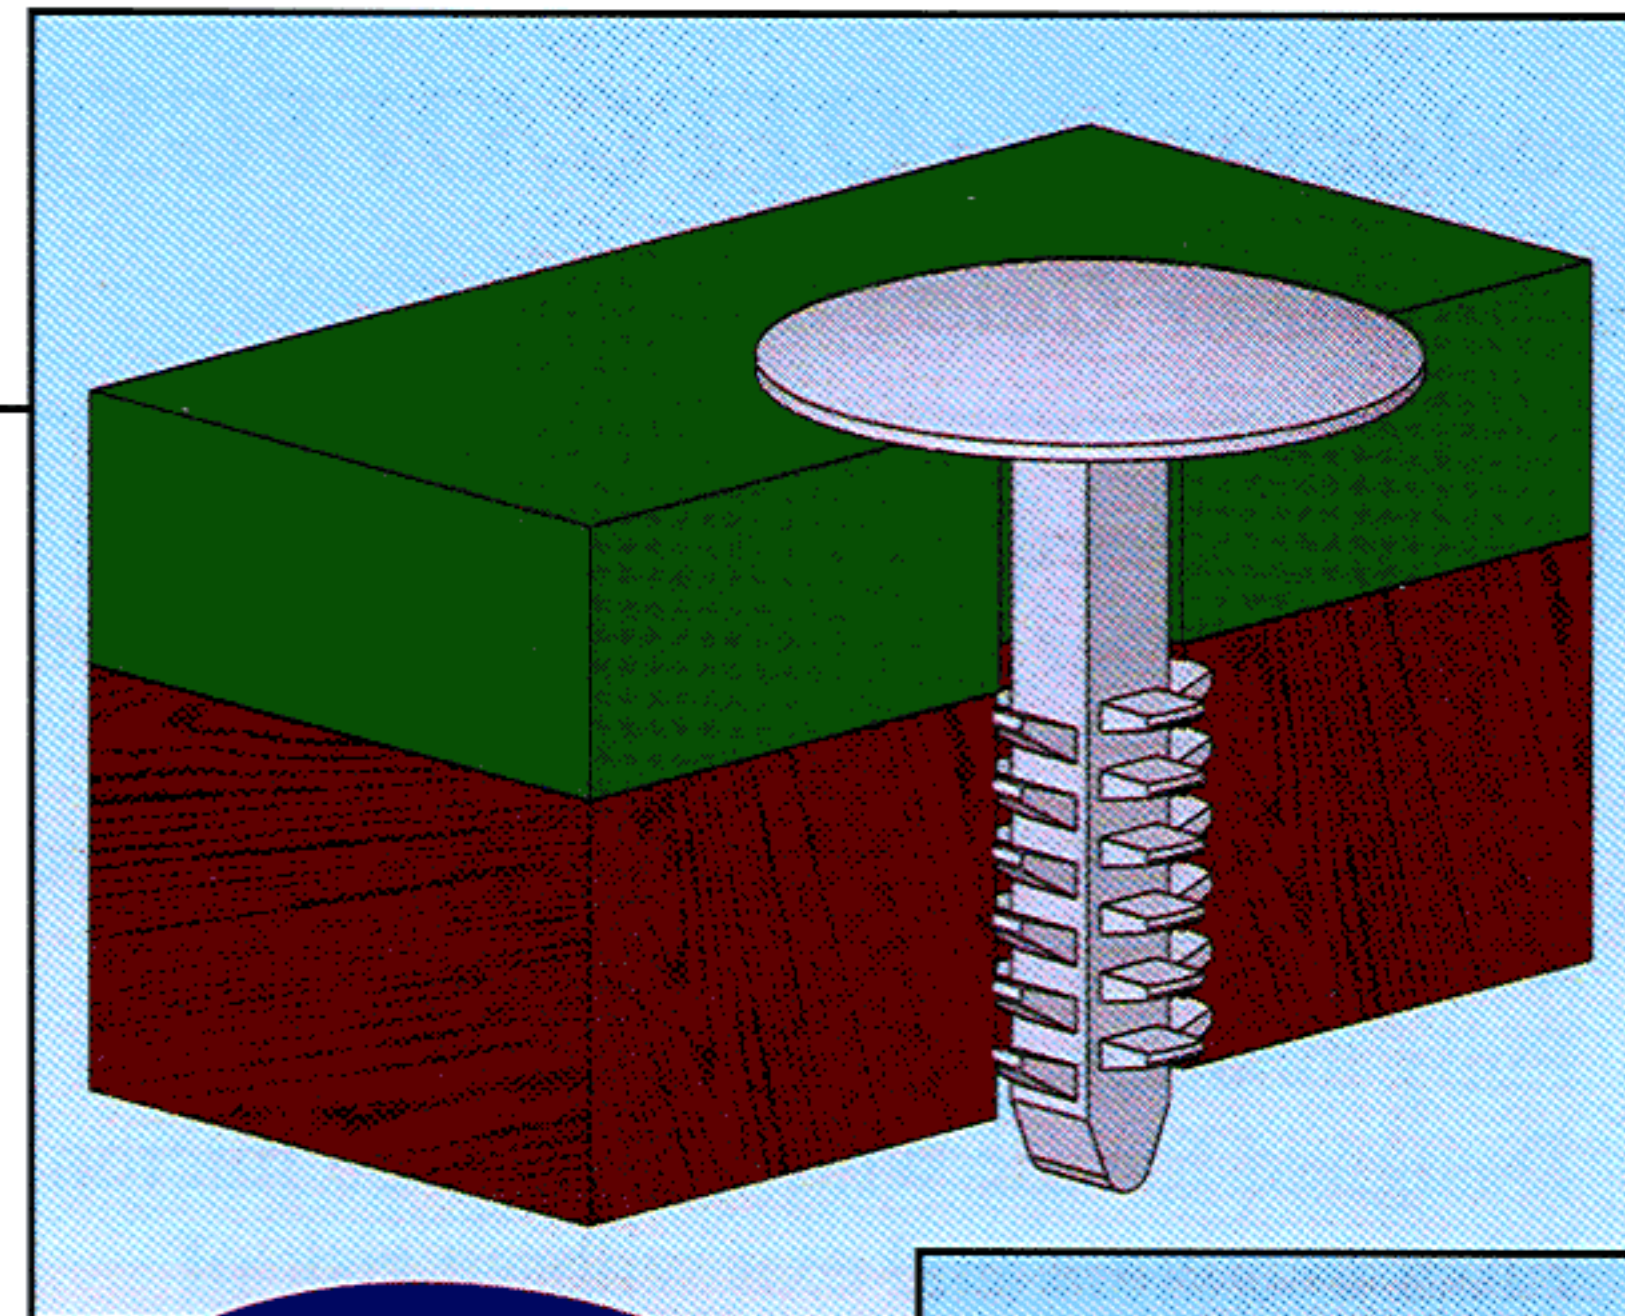


Featured  
in the NEW  
Edition 27 Catalog—  
Available Now

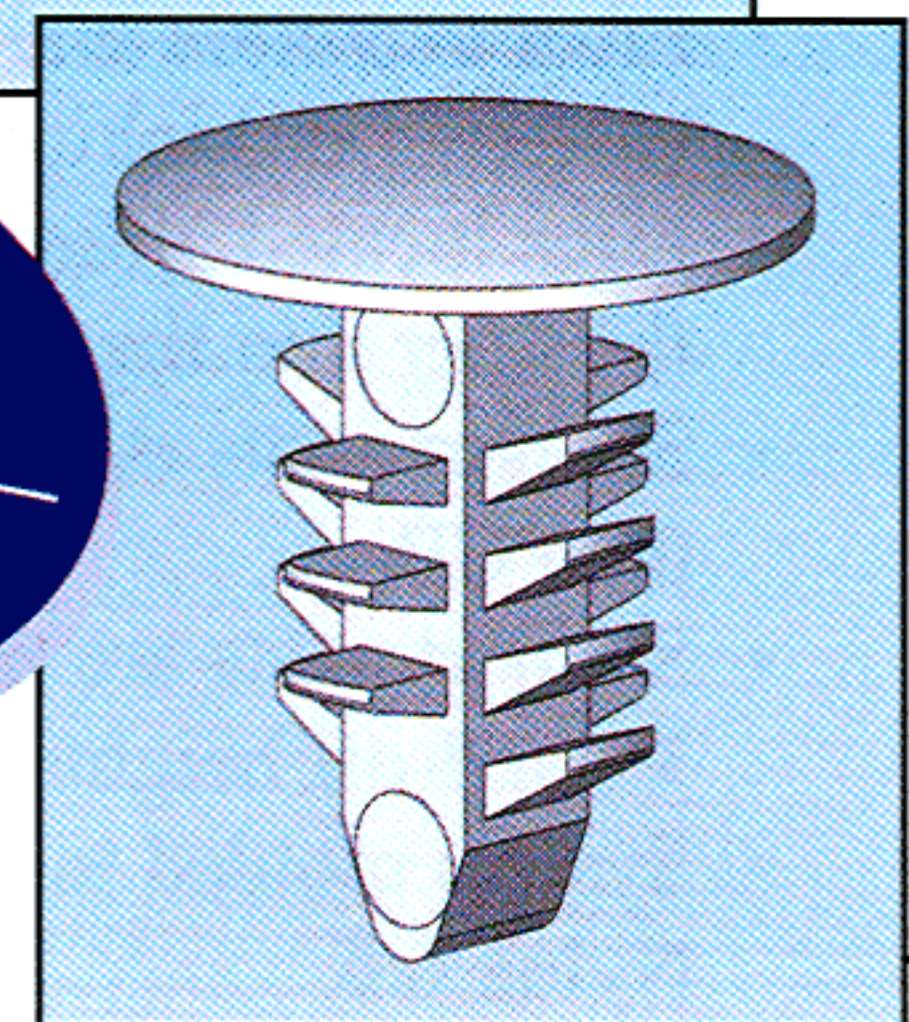

RBF			Standard Pack: 1,000 per bag					
Mat'l: Nylon 6/6, RMS-01* Color: Black	Hole Diameter ± 0.003 (0.08)	Head Diameter	Suggested Total Board Thickness	Head Height	Length			
RBF-4-8.6-8	.157(4.00)	.32(8.0)	.08-.17 (2.1-4.3)	.04(1.0)	.34 (8.6)			
RBF-4-11.1-8			.08-.28 (2.1-7.2)		.44 (11.1)			
RBF-4-15-8			.22-.42 (5.7-10.7)		.59 (15.0)			
RBF-4-8.6-12			.08-.17 (2.1-4.3)		.47(12.0)	.08-.17 (2.1-4.3)	.06(1.5)	.34 (8.6)
RBF-4-11.1-12			.08-.28 (2.1-7.2)			.44 (11.1)		
RBF-4-15-12			.22-.42 (5.7-10.7)			.59 (15.0)		
RBF-4-8.6-16		.08-.17 (2.1-4.3)	.63(16.0)	.08-.17 (2.1-4.3)		.08(2.0)		.34 (8.6)
RBF-4-11.1-16		.08-.28 (2.1-7.2)		.44 (11.1)				
RBF-4-15-16		.22-.42 (5.7-10.7)		.59 (15.0)				
RBF-4.8-8.6-8		.188(4.76)		.32(8.0)	.08-.17 (2.1-4.3)		.04(1.0)	.34 (8.6)
RBF-4.8-11.1-8					.08-.28 (2.1-7.2)			.44 (11.1)
RBF-4.8-15-8					.22-.42 (5.7-10.7)			.59 (15.0)
RBF-4.8-8.6-12	.08-.17 (2.1-4.3)		.47(12.0)		.08-.17 (2.1-4.3)	.06(1.5)		.34 (8.6)
RBF-4.8-11.1-12	.08-.28 (2.1-7.2)				.44 (11.1)			
RBF-4.8-15-12	.22-.42 (5.7-10.7)				.59 (15.0)			
RBF-4.8-8.6-16	.08-.17 (2.1-4.3)			.63(16.0)	.08-.17 (2.1-4.3)		.08(2.0)	.34 (8.6)
RBF-4.8-11.1-16	.08-.28 (2.1-7.2)				.44 (11.1)			
RBF-4.8-15-16	.22-.42 (5.7-10.7)				.59 (15.0)			
RBF-6.4-8.6-8	.250(6.35)		.32(8.0)		.08-.17 (2.1-4.3)	.04(1.0)		.34 (8.6)
RBF-6.4-11.1-8					.08-.28 (2.1-7.2)			.44 (11.1)
RBF-6.4-15-8					.22-.42 (5.7-10.7)			.59 (15.0)
RBF-6.4-8.6-12		.08-.17 (2.1-4.3)		.47(12.0)	.08-.17 (2.1-4.3)		.06(1.5)	.34 (8.6)
RBF-6.4-11.1-12		.08-.28 (2.1-7.2)			.44 (11.1)			
RBF-6.4-15-12		.22-.42 (5.7-10.7)			.59 (15.0)			
RBF-6.4-8.6-16		.08-.17 (2.1-4.3)	.63(16.0)		.08-.17 (2.1-4.3)	.08(2.0)		.34 (8.6)
RBF-6.4-11.1-16		.08-.28 (2.1-7.2)			.44 (11.1)			
RBF-6.4-15-16		.22-.42 (5.7-10.7)			.59 (15.0)			
RBF-7.1-11.1-8		.281(7.14)		.32(8.0)	.08-.28 (2.1-7.2)		.04(1.0)	.44 (11.1)
RBF-7.1-15-8					.15-.42 (3.8-10.7)			.59 (15.0)
RBF-7.1-19-8					.27-.56 (6.9-14.2)			.75 (19.0)
RBF-7.1-11.1-12	.08-.28 (2.1-7.2)		.47(12.0)		.08-.28 (2.1-7.2)	.06(1.5)		.44 (11.1)
RBF-7.1-15-12	.15-.42 (3.8-10.7)				.59 (15.0)			
RBF-7.1-19-12	.27-.56 (6.9-14.2)				.75 (19.0)			
RBF-7.1-11.1-16	.08-.28 (2.1-7.2)			.63(16.0)	.08-.28 (2.1-7.2)		.08(2.0)	.44 (11.1)
RBF-7.1-15-16	.15-.42 (3.8-10.7)				.59 (15.0)			
RBF-7.1-19-16	.27-.56 (6.9-14.2)				.75 (19.0)			

\*Parts are available in UL94 V0 material by special order only. Natural color available by special order only.

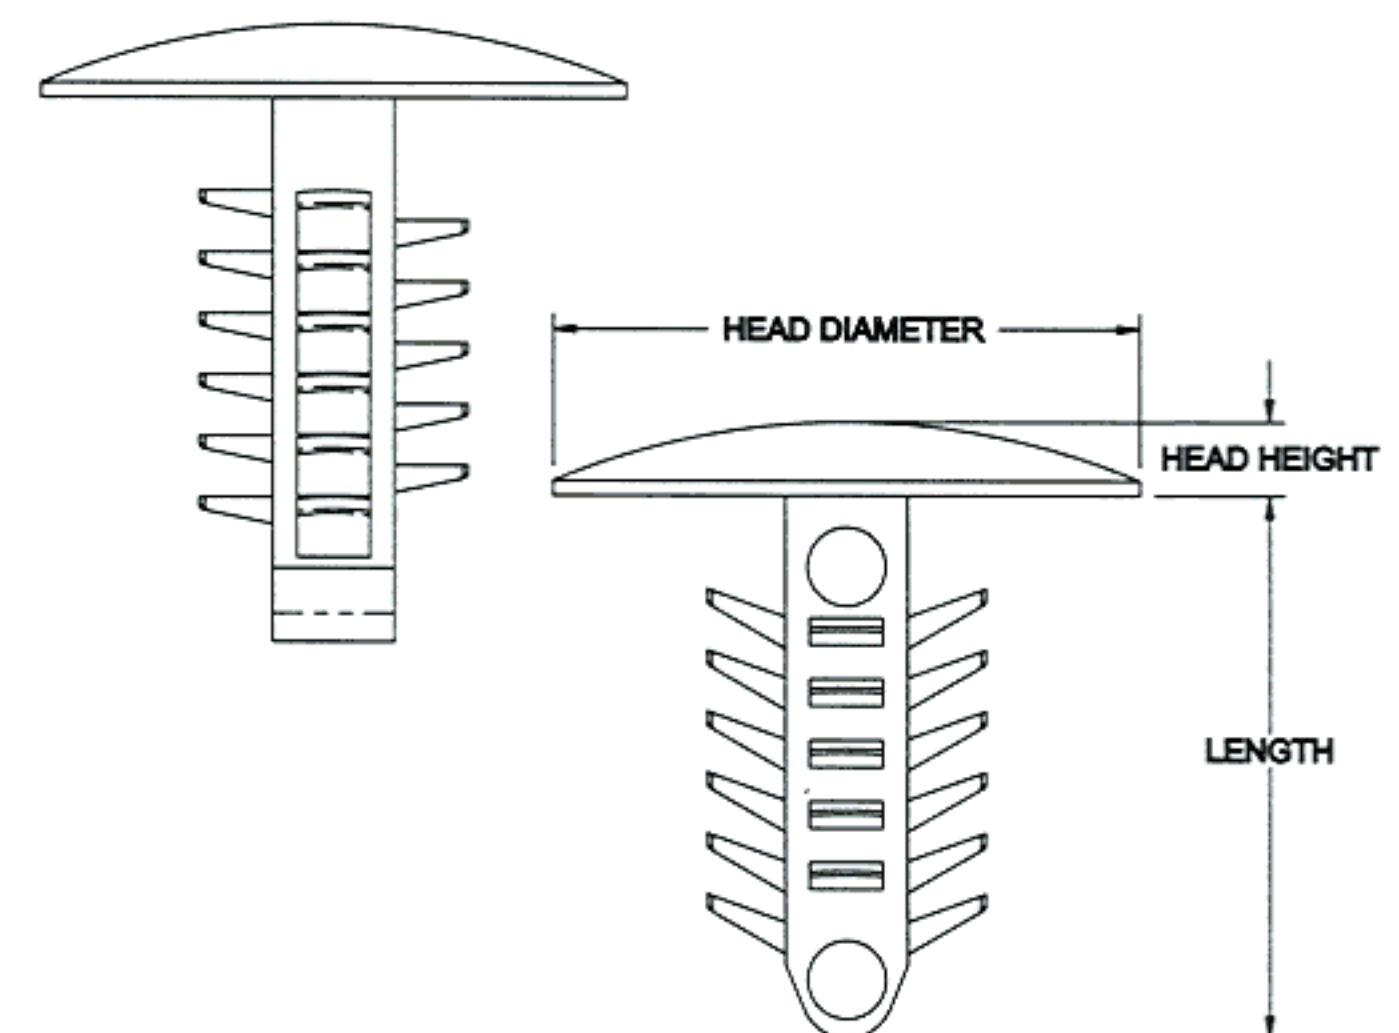

### Markets

- Point of Purchase Display
- Consumer Electronics— Audio and Video Equipment
- Automotive— GPS, Audio Equipment, Safety Devices
- White Goods— Washing Machines and Ovens
- Telecom and Datacom— Patch Panels and Distribution Racks