Richco®

NEW PRODUCT BULLETIN

09/06-8

Introducing the *BPM*—

Pull Mount Bumper

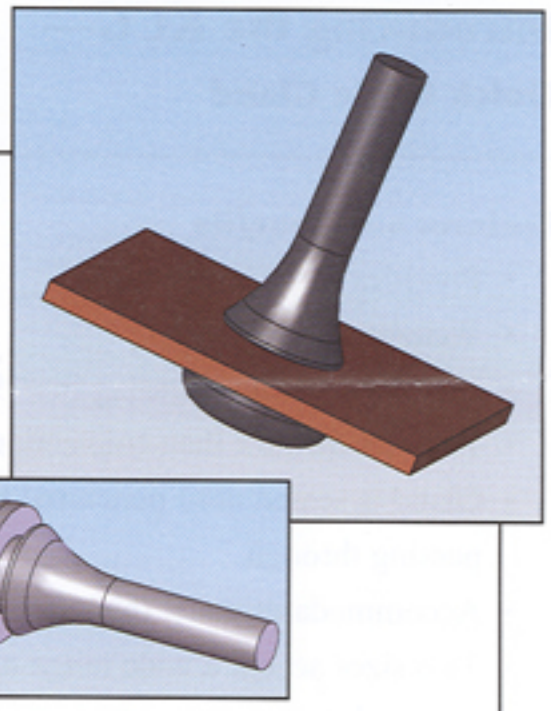

Features and Benefits

- Easily installed by pulling the foot through a panel hole
- No tools or mounting hardware necessary
- Pull mount end can be cut off after application to save space
- Rubber material provides shock and vibration protection and skid resistance
- High temperature resistance -67° to 482°F (-55° to 250°C)
- RoHS Compliant

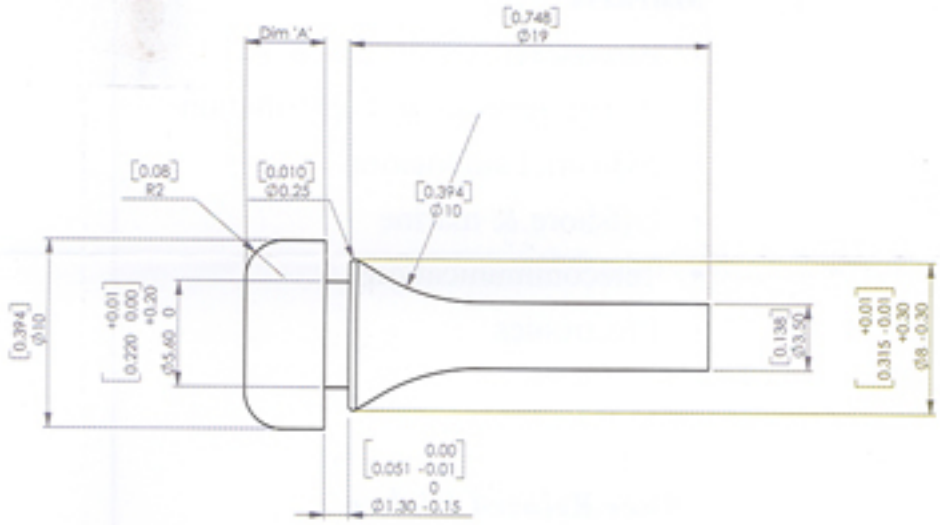

Material: Silicone Rubber, RMS-321		Standard Pack: 1,000 per bag		
Part No.	"A"	Color	Hole Dia.	Panel Thickness
BPM-1	3 ± 0.25 (.118 ± 0.01)	Gray	6 - 6.35 (.24 - .25)	1.5 (.059)
BPM-2	4.2 ± 0.25 (.165 ± 0.01)	Black		
All dimensions in mm (inches).				

Markets

- Consumer Electronics
- Office Equipment
- White Goods
- Furniture
- Telecommunications
- Medical Equipment

Other Related Richco Product Solutions

POF

SFF

RBS

SVF

SOF