



## Introducing the *SRB*— UL Approved Strain Relief Bushings

### Features and Benefits

- Richco's SRB series is now UL Listed!! #E107293
- Absorbs the forces of push and pull that may be exerted on cords & cables
- SRPL-2 Tool is required for installation and sold separately

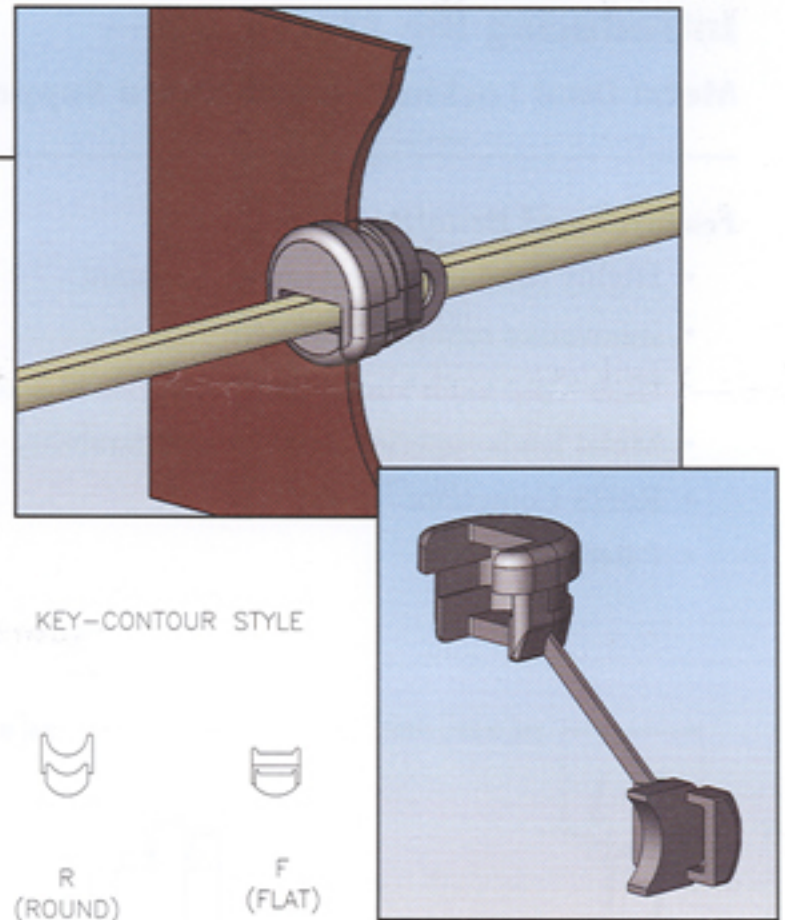

MOUNTING HOLE



BUSHING DIMENSIONS



KEY-CONTOUR STYLE


 R  
(ROUND)

 F  
(FLAT)

Material: Nylon 6/6, RMS-315 Color: Black								
Standard Pack: 500 per bag			UL Listed, Card #E107293					
Part No.	Wires Accommodated	Approx. Wire Size	Mounting Holes		"C" Ref.	"D" ±.010 (.254)	"E" Ref.	"F" Max. Panel Thickness
			"A"	"B"				
SRB-F-1	SPT-1	.118 x .220 (3 x 5.6)	.374 (9.5)	.343 (8.7)	.425 (10.8)	.406 (10.3)	.157 (4)	.063 (1.6)
SRB-F-3			.433 (11)	.390 (9.9)	.476 (12.1)			
SRB-F-6					.492 (12.5)			
SRB-F-8	SPT-2	.146 x .299 (3.71 x 7.6)	.500 (12.7)	.465 (11.8)	.547 (13.9)		.157 (4)	.063 (1.6)
		.150 x .299 (3.8 x 7.6)	.516 (13.1)					
SRB-F-9		.146 x .299 (3.71 x 7.6)	.500 (12.7)					
		.150 x .299 (3.8 x 7.6)	.516 (13.1)					
SRB-R-1	SVI	.252 (6.4)	.500 (12.7)	.453 (11.5)	.559 (14.2)	.433 (11)	.165 (4.2)	.063 (1.6)
	SVT	.291 (7.4)	.516 (13.1)					
SRB-R-2	SVI	.252 (6.4)	.500 (12.7)	.453 (11.5)	.559 (14.2)	.433 (11)	.165 (4.2)	.098 (2.5)
	SVT	.291 (7.4)	.516 (13.1)					
SRB-R-3	SJT #18/3	.299 (7.6)	.626 (15.9)	.551 (14)	.701 (17.8)	.583 (14.8)	.220 (5.6)	.063 (1.6)
SRB-R-4					.693 (17.6)			.126 (3.2)
SRB-R-7	SJT #16/3	.323 - .362 (8.2 - 9.2)	.626 (15.9)	.551 (14)	.701 (17.8)	.583 (14.8)	.228 (5.8)	.063 (1.6)
SRB-R-8					.681 (17.3)			.126 (3.2)


### Markets

- Consumer Electronics
- Office Electronics
- White Goods
- Telecommunications

### Other Related Richco Products



LGT



SB



PGSC



DGB