




Heyco® Smooth Bore Bushings

PANEL DIMENSIONS				PART NO.	DESCRIPTION	PART DIMENSIONS					
Maximum Thickness		Mounting Hole Diameter				Black	A Inside Diameter		B Head Diameter		C Overall Height
in.	mm.	in.	mm.		in.	mm.	in.	mm.	in.	mm.	
.062	1,6	.500	12,7	2514	S 50	.25	6,4	.56	14,2	.27	6,9
.125	3,2	.625	15,9	2516	S 625-4	.25	6,4	.72	18,3	.44	11,2
.125	3,2	.750	19,1	2535	S 750-5	.36	9,1	.91	23,1	.44	11,2
.062	1,6	.875	22,3	2540	S 87	.52	13,2	.98	24,9	.32	8,1
.125	3,2	.875	22,3	2552	S 875-9	.56	14,2	.97	24,6	.52	13,1
.125	3,2	1.000	25,4	2554	S 1000-9	.60	15,2	1.19	30,2	.52	13,1
.125	3,2	1.093	27,8	2555	S 1093-10	.63	16,0	1.21	30,7	.52	13,1

Standard color black. Consult Heyco for white and other colors.

- Extra internal insulating sleeve creates a smooth bore and prevents locking fingers from protruding into the ID of the Bushing.
- Large radius exit hole.
- Used to protect through-holes. Eliminates sharp edges so wires are protected.
- Absorbs vibration, and cushions and insulates wires.
- Can be used as bushing for rotating shafts.
- Bushing inserts into mounting hole with fingertip pressure.

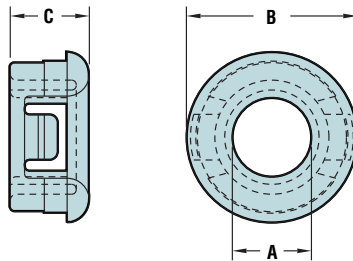

SINGLE PANEL THICKNESS

Material	6/6 Nylon
Certifications	Recognized under the Component Program of Underwriters' Laboratories File E15331 Certified by the Canadian Standards Association File LR8919
Flammability Rating	94V-2
Material Temperature Index	257°F (125°C)—Maximum temperature on part not to exceed 221°F (105°C)

Quick Specs