
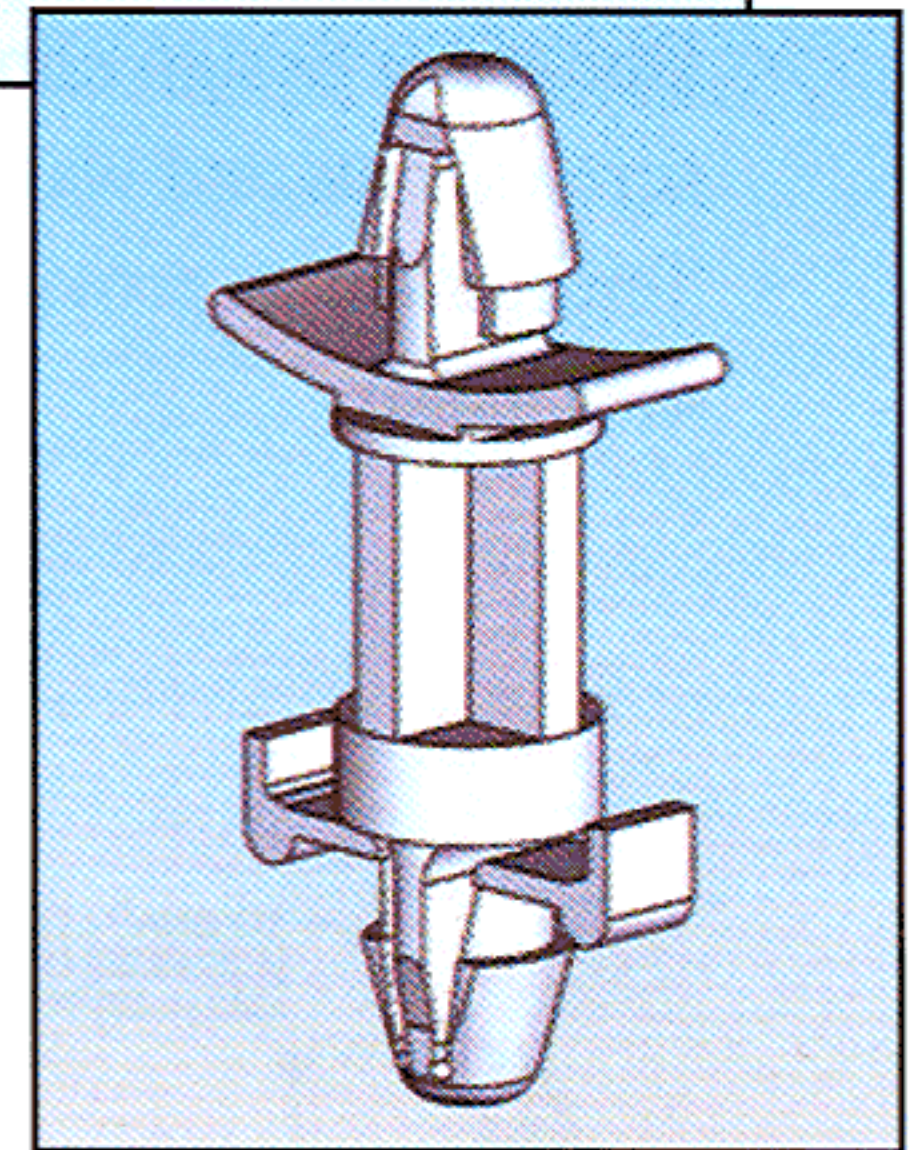


Introducing the **DLCBSRA3**— Releasable Dual Locking Circuit Board Support


Features and Benefits

- Releasable arrowhead on base
- Locking arrowhead on top
- Easily installed and removed by hand
- Tension wings provide a tight fit
- One piece design eliminates the need for screws, washers and nuts
- Available in 5 alternative stand-off heights
- Manufactured of durable Nylon 6/6
- Flame retardant, UL94 VO material available by special order
- Meets the needs of European WEEE Initiative

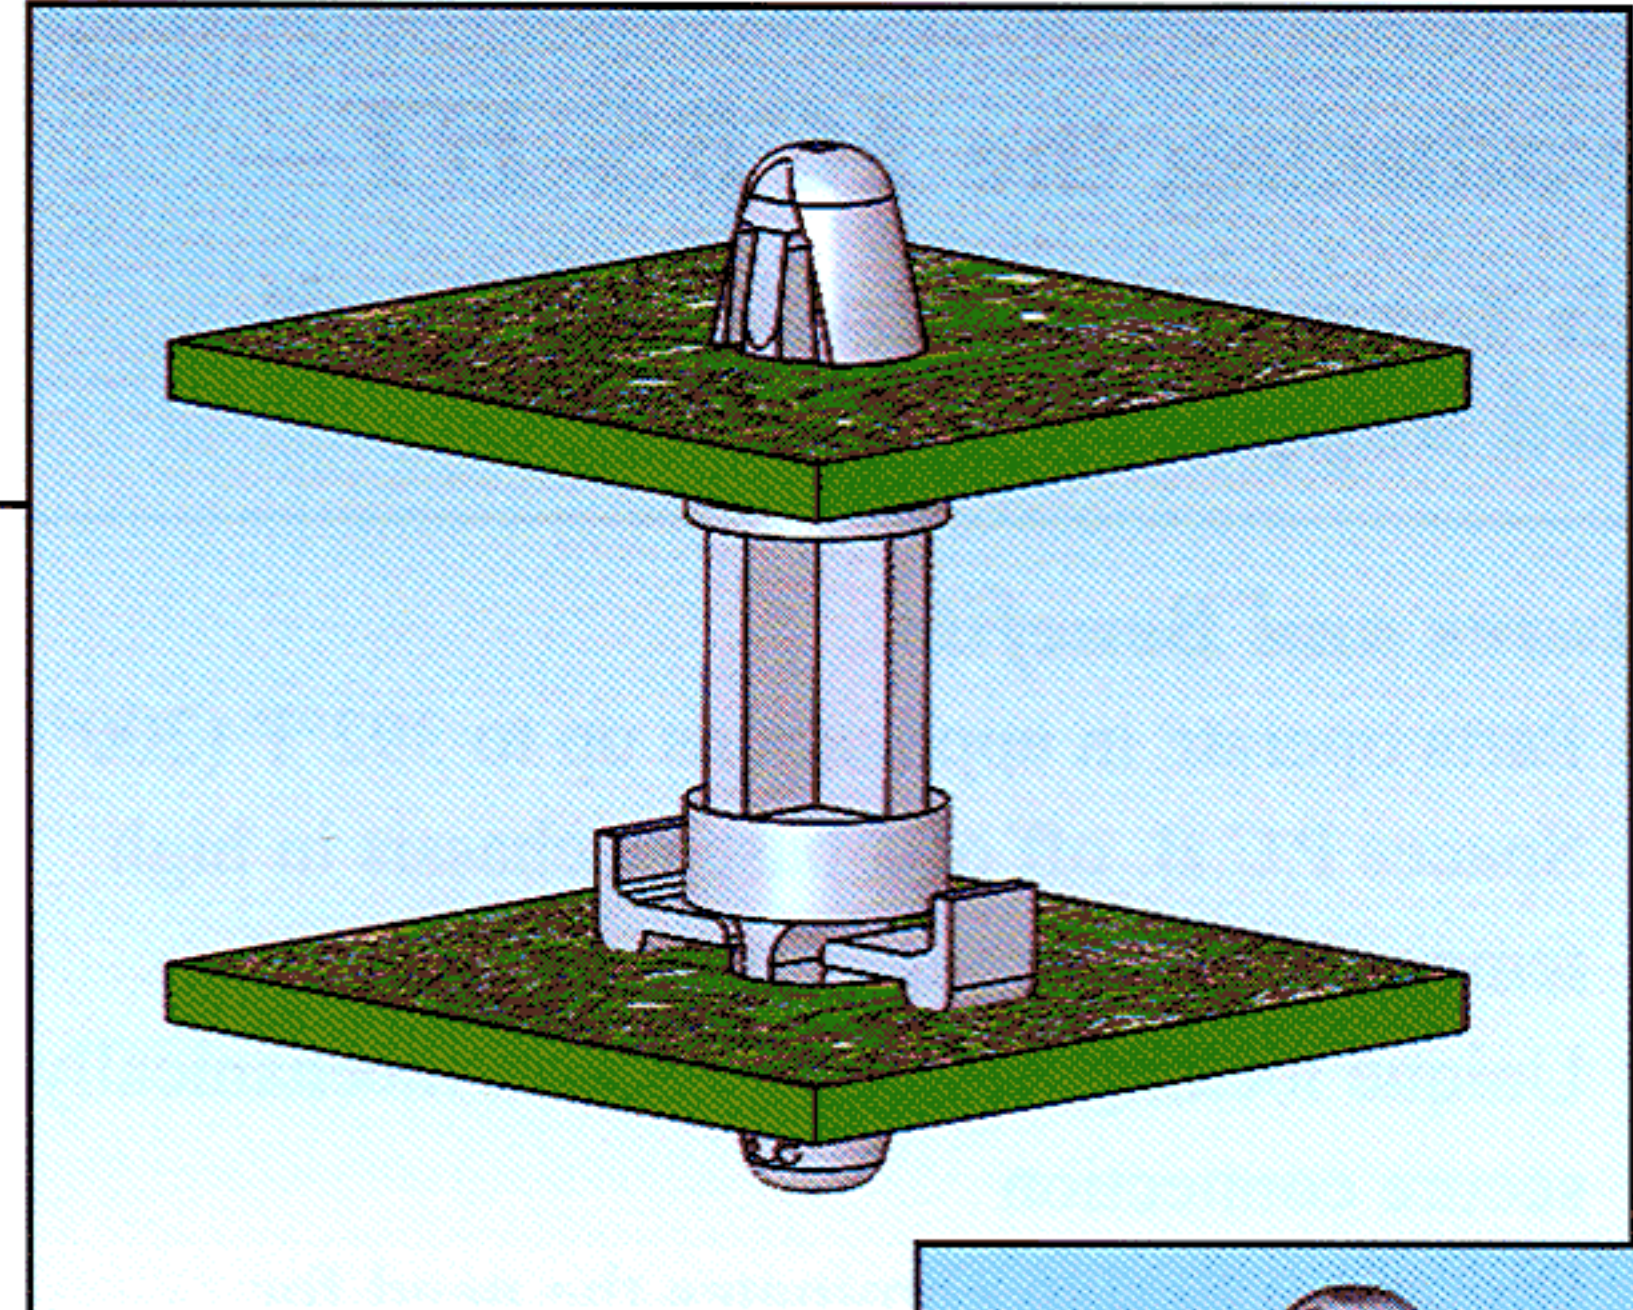

Featured
in the NEW
Edition 27 Catalog—
Available Now

TO SNAP-LOCK INTO .187±.003
[4.75±0.08] HOLE, IN A .031 TO .078
[0.79 TO 1.98] THICK BOARD

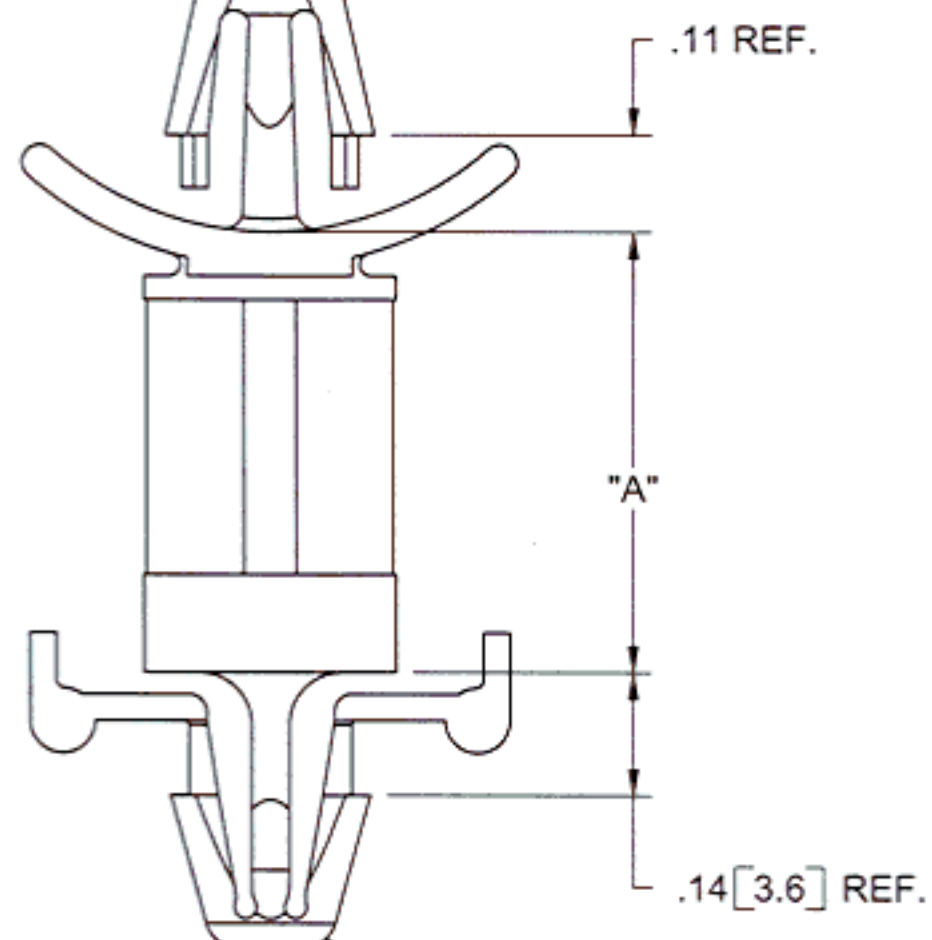

TO SNAP-LOCK INTO .187±.003
[4.75±0.08] HOLE, IN A .062 [1.57]
THICK BOARD


DLCBSRA	Standard Pack: 1,000 per bag
Mat'l: Nylon 6/6, RMS-01* Color: Natural	Standoff Height "A" ± .015 (0.4)
DLCBSRA3-6-01	3/8 (9.5)
DLCBSRA3-8-01	1/2 (12.7)
DLCBSRA3-10-01	5/8 (15.9)
DLCBSRA3-12-01	3/4 (19.1)
DLCBSRA3-14-01	7/8 (22.2)

*Parts are available in UL94 VO material by special order only. To order, replace -01 with -19.


Markets

- Medical Technology
- Automotive
- Audio/Video Equipment
- Security Systems
- White Goods
- Telecommunications Equipment
- Office Equipment


Other Related Richco Product Solutions




DLCBS




LCBS



DLCBST




SP2




WSLTRA



WIT-XAR



USR



RKW