
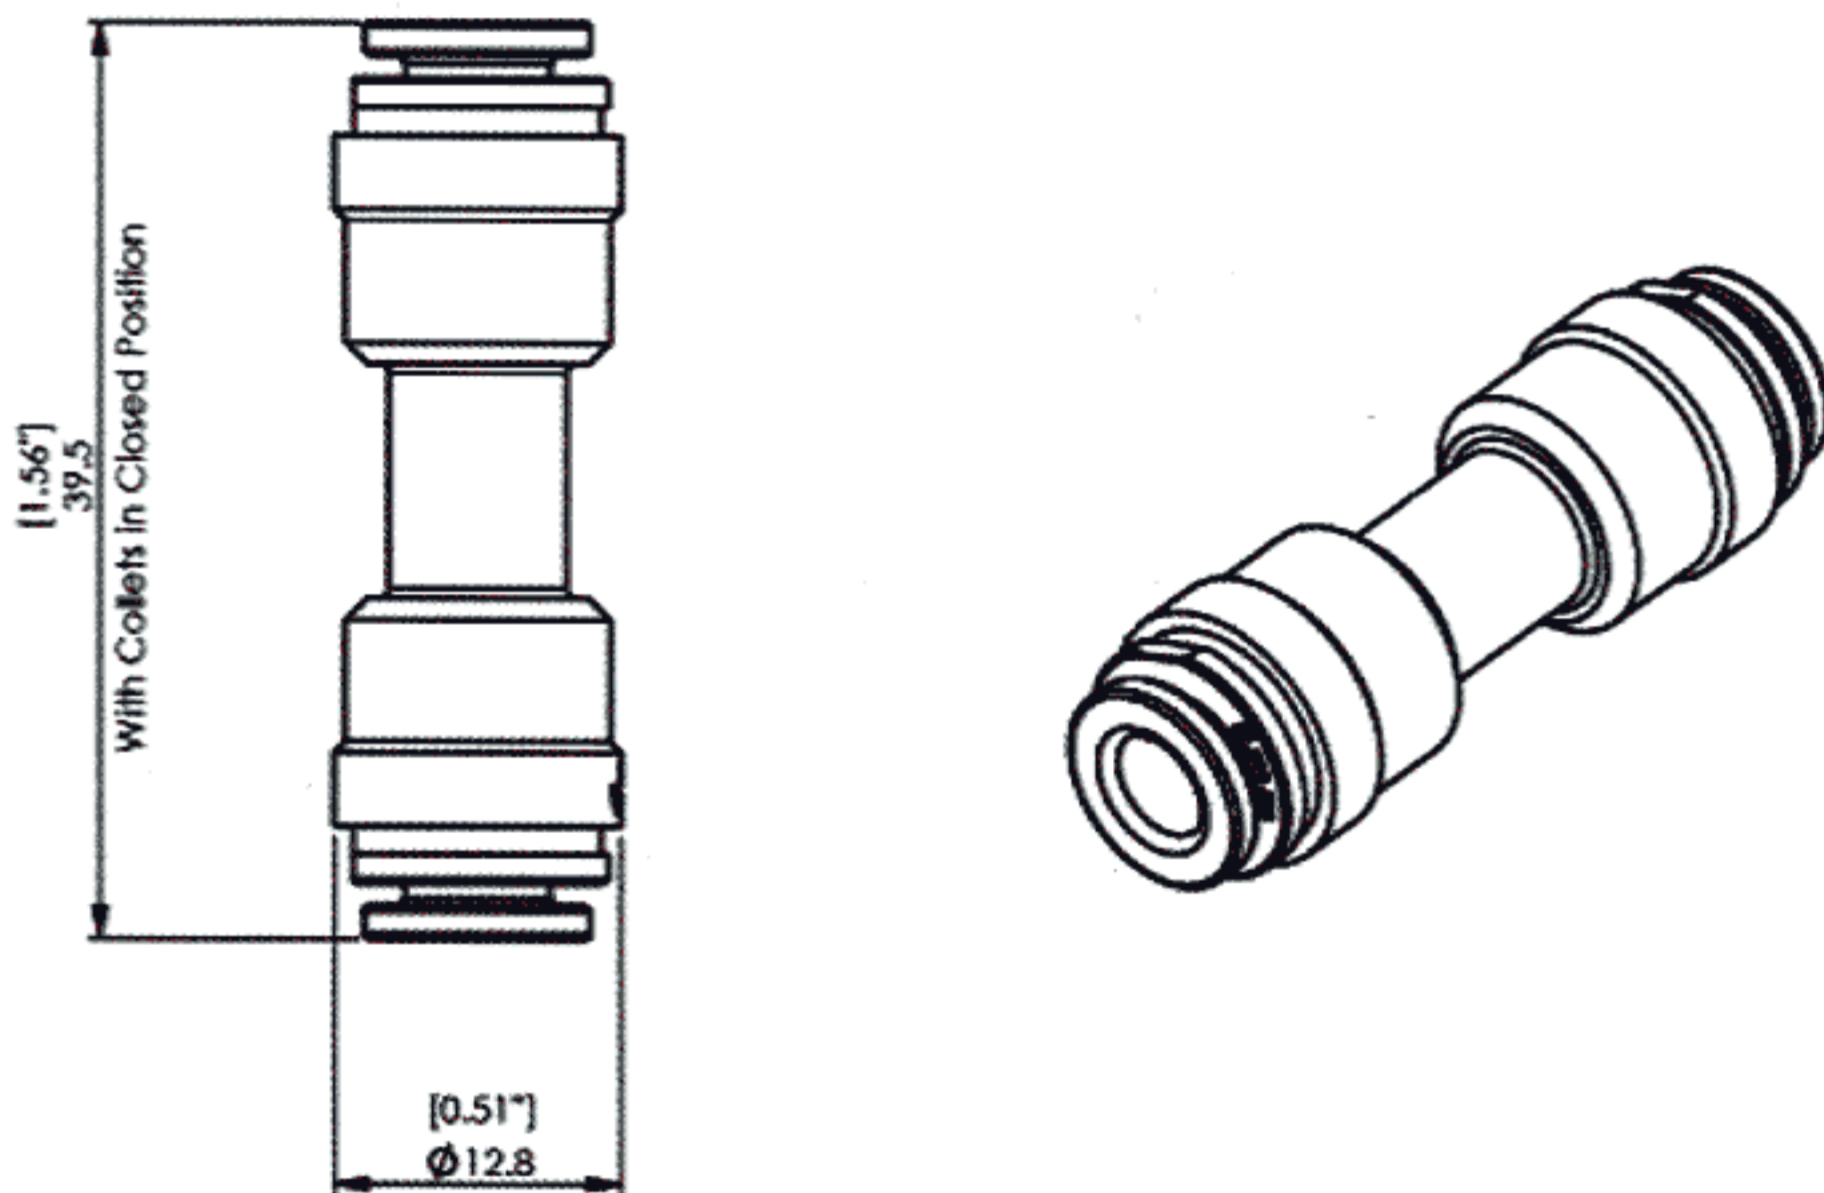
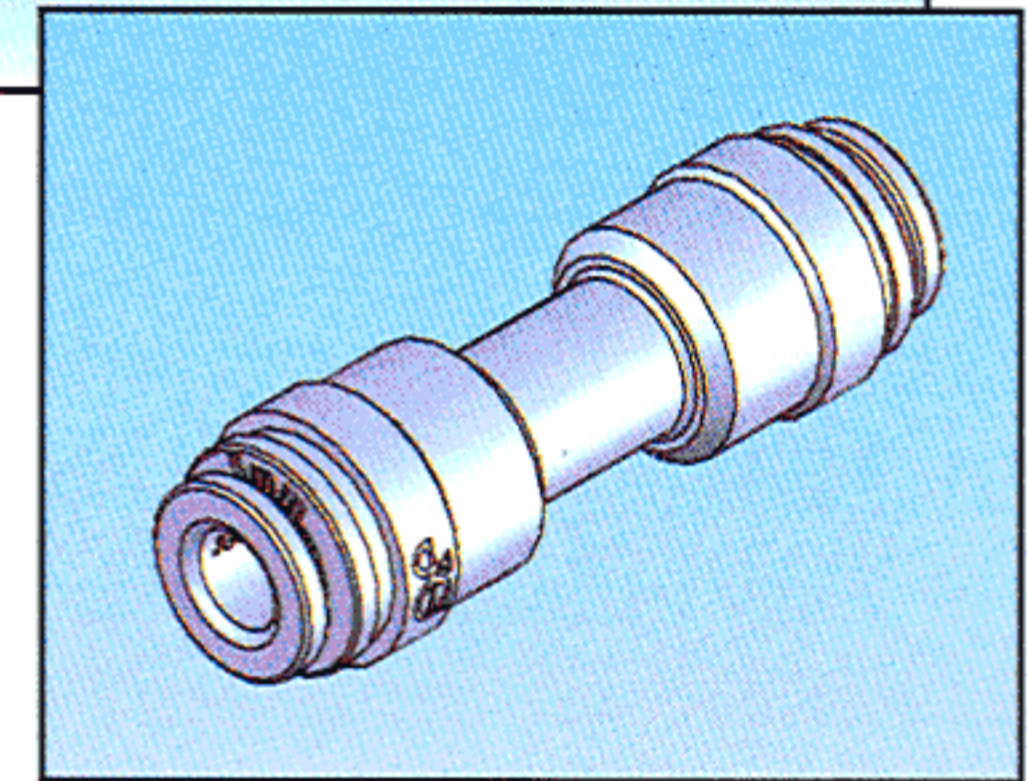


Introducing the **OBFC-5-1**— Optical Blown Fiber Connector

Features and Benefits


- Ideal for Fiber to the Home (FTTH) & Premises (FTTP) blown fiber applications
- Great connection system for joining standard element tubing to Richco OFBLT
- For use with standard element 5mm OD blown fiber tubing or with Richco OFBLT-XX-05-PP
- Clear Polycarbonate enables installer to see fiber through connector body
- Nitrile O-rings provide gas- and water-tight seal
- Excellent tube retention via collets and metal grip rings
- Quick & easy push fit

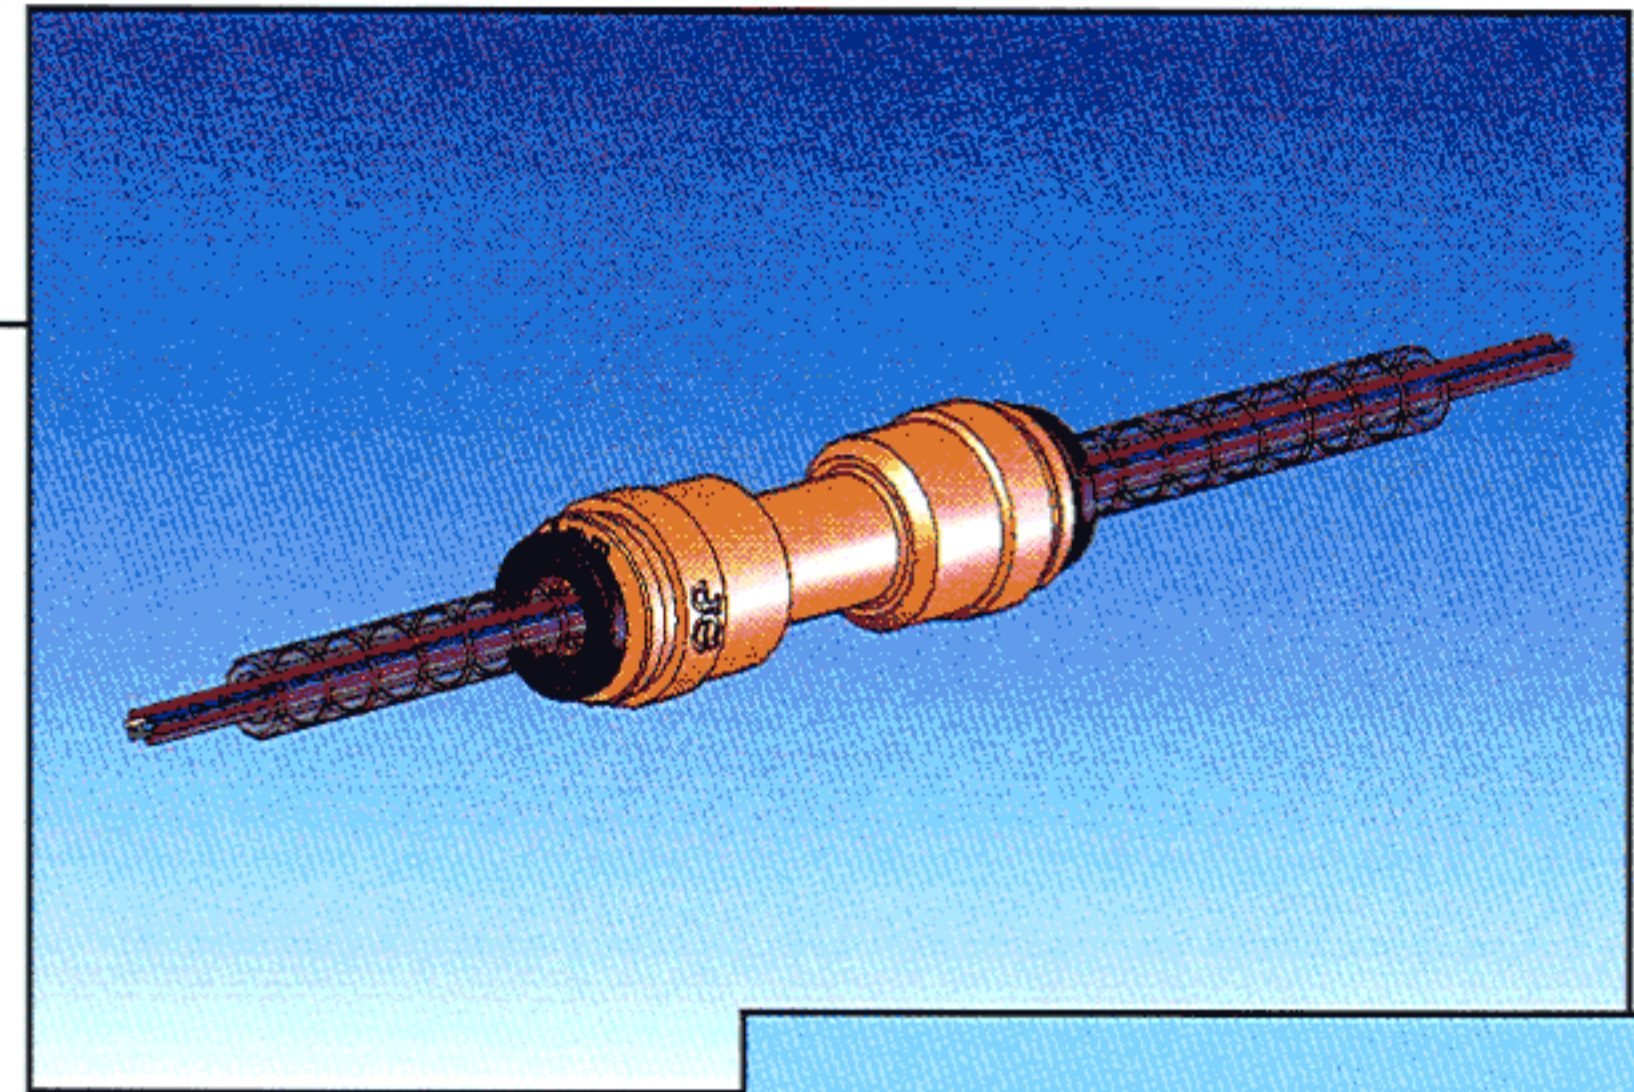


Markets

- FTTH, FTTP
- Curbside Rack Units, Distribution Frames
- Primary & Secondary Nodes
- Branch-out and Splice Closure Units

Other Related Richco Product Solutions



OFBLT



OFBLT-C1




TPCE




OFTGS




OFD



OFSMB



OFSRG



OFCBU

OBFC-5-1		
Component	Material	Color
5mm O-Rings	Nitrile, RMS-201	Black
5mm Collets	Acetel, RMS-202	Black
	Stainless Steel Grip Ring, RMS-203	Steel
5mm Body	Polycarbonate, RMS-204	Clear
Tube Insertion Depth: 16.8mm with Collets in release position		
For Coupling (5mm dia.):	OFBLT-XX-05-PP	
	OFBLT-P-XX-05-PP	
	OFBLTS-XX-05-PP	